




Brass

SS2KGP Industrial Cable Gland

CMP SS2KGP type brass indoor and outdoor cable gland for use with all types of Unarmoured cable, providing mechanical cable retention and an environmental seal on the cables inner and outer sheath or a double seal on the cable outer sheath. Suitable for applications where superior cable pull out resistance is required.

All CMP Cable Glands are EMC Tested.

The CMP SS2KGP range of industrial cable glands is designed and tested to BS 6121:Part 1:1989, meets or surpasses the requirements of EN 50262 :1999, and is produced from Brass grade CuZn39Pb3 (CW614N) to EN12168.

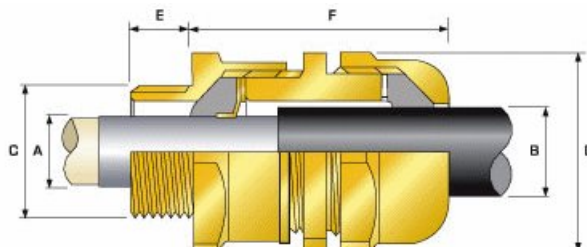

Cable Gland Selection Table

Cable Gland Size	Available Entry Threads "C"			Minimum Thread Length "E"	Overall Cable Diameter "A/B"		Across Flats "D"	Across Corners "D"	Protrusion Length "F"	Ordering Reference (Brass Metric) #	PVC Shroud Ref *	Cable Gland Weight (Kgs)
	Standard		Option		Max	Max	Max	Max				
	Metric	NPT	NPT									
20S/16	M20	1/2"	3/4"	10.0	3.1	8.7	24.0	25.9	42.0	20S16SS2KGP1RA	PVC05	0.072
20S	M20	1/2"	3/4"	10.0	6.1	11.7	24.0	25.9	42.0	20SSS2KGP1RA	PVC05	0.072
20	M20	1/2"	3/4"	10.0	6.5	14.0	27.0	29.2	47.0	20SS2KGP1RA	PVC05	0.079
25	M25	3/4"	1"	10.0	11.1	20.0	36.0	38.9	56.0	25SS2KGP1RA	PVC09	0.149
32	M32	1"	1 1/4"	10.0	17.0	26.3	41.0	44.3	58.0	32SS2KGP1RA	PVC10	0.170
40	M40	1 1/4"	1 1/2"	15.0	22.0	32.2	50.0	54.0	60.0	40SS2KGP1RA	PVC13	0.224
50S	M50	1 1/2"	2"	15.0	29.5	38.2	55.0	59.4	62.0	50SSS2KGP1RA	PVC15	0.298
50	M50	2"	2 1/2"	15.0	35.6	44.1	60.0	64.8	64.0	50SS2KGP1RA	PVC18	0.308
63S	M63	2"	2 1/2"	15.0	40.1	50.1	70.0	75.6	66.0	63SSS2KGP1RA	PVC21	0.480
63	M63	2 1/2"	3"	15.0	47.2	56.0	75.0	81.0	67.0	63SS2KGP1RA	PVC23	0.458
75S	M75	2 1/2"	3"	15.0	52.8	62.0	79.0	85.3	68.0	75SS2KGP1RA	PVC24	0.621
75	M75	3"	3 1/2"	15.0	59.1	68.0	84.0	90.7	70.0	75SS2KGP1RA	PVC26	0.526
90	M90	3"	3 1/2"	15.0	66.6	79.4	108.0	116.6	75.0	90SSS2KGP1RA	PVC31	1.795
100	M100	4"	-	15.0	76.0	91.0	122.0	131.8	81.0	100SSS2KGP1RA	PVC32	2.100
115	M115	-	-	15.0	86.0	98.0	138.0	149.9	85.0	115SSS2KGP1RA	LSF34	3.096
130	M130	-	-	15.0	97.0	115.0	154.0	166.3	92.0	130SSS2KGP1RA	LSF35	4.530

Dimensions are displayed in millimetres unless otherwise stated

NOTE: *CMP SOLO LSF Halogen Free Shrouds also available on request. # Other thread forms are available.

Cable Gland Size	Available Entry Threads "C"			Min Thread Length "E"	Diameter Over Lead Sheath "A"		Overall Cable Diameter "B"		Across Flats "D"	Across Corners "D"	Protrusion Length "F"	Ordering Reference (Brass Metric) #	PVC Shroud Ref *	Cable Gland Weight (Ozs)
	Standard		Option		Min	Max	Min	Max	Max	Max				
	Metric	NPT	NPT											
20S/16	M20	1/2"	3/4"	0.591	0.126	0.303	0.122	0.343	0.945	1.020	1.654	20S16SS2KPB1RA	PVC05	2.54
20S	M20	1/2"	3/4"	0.591	0.240	0.421	0.240	0.461	0.945	1.020	1.654	20SSS2KPB1RA	PVC05	2.54
20	M20	1/2"	3/4"	0.591	0.256	0.512	0.256	0.551	1.063	1.150	1.850	20SS2KPB1RA	PVC05	2.79
25	M25	3/4"	1"	0.591	0.437	0.748	0.437	0.787	1.417	1.531	2.205	25SS2KPB1RA	PVC09	5.26
32	M32	1"	1 1/4"	0.591	0.669	0.996	0.669	1.035	1.614	1.744	2.283	32SS2KPB1RA	PVC10	6.00
40	M40	1 1/4"	1 1/2"	0.591	0.925	1.228	0.866	1.268	1.969	2.126	2.362	40SS2KPB1RA	PVC13	7.90
50S	M50	1 1/2"	2"	0.591	1.220	1.465	1.161	1.504	2.165	2.339	2.441	50SSS2KPB1RA	PVC15	10.51
50	M50	2"	2 1/2"	0.591	1.402	1.697	1.402	1.736	2.362	2.551	2.520	50SS2KPB1RA	PVC18	10.86
63S	M63	2"	2 1/2"	0.591	1.634	1.929	1.579	1.972	2.756	2.976	2.598	63SSS2KPB1RA	PVC21	16.93
63	M63	2 1/2"	3"	0.591	1.858	2.165	1.858	2.205	2.953	3.189	2.638	63SS2KPB1RA	PVC23	16.16
75S	M75	2 1/2"	3"	0.591	2.126	2.402	2.079	2.441	3.110	3.358	2.677	75SSS2KPB1RA	PVC24	21.91
75	M75	3"	3 1/2"	0.591	2.406	2.638	2.327	2.677	3.307	3.571	2.756	75SS2KPB1RA	PVC26	18.55
90	M90	3"	3 1/2"	0.591	2.622	3.110	2.622	3.126	4.252	4.591	2.953	90SSS2KPB1RA	PVC31	63.32
100	M100	4"	-	0.591	2.992	3.543	2.992	3.583	4.803	5.189	3.189	100SSS2KPB1RA	PVC32	74.08
115	M115	-	-	0.591	3.386	3.819	3.386	3.858	5.433	5.866	3.346	115SSS2KPB1RA	LSF34	109.21
130	M130	-	-	0.591	3.819	4.488	3.819	4.528	6.063	6.547	3.622	130SSS2KPB1RA	LSF35	159.79

Dimensions are displayed in inches unless otherwise stated

NOTE: *CMP SOLO LSF Halogen Free Shrouds also available on request. # Other thread forms are available.



Edited with Infix PDF Editor
- free for non-commercial use.

To remove this notice, visit:
www.iceni.com/unlock.htm

16.02.2012 13:20:35

TECHNICAL DATA

GOST R Certificate Number	POCC GB.06.H00187
GOST GGTN Permit	PPC 00-40706
GOST K Certificate Number	KZ 75000361 01 01 14761
RoK Permit For Use Number	19-02-UL-1957
Type	SS2KGP
Design Specification	BS 6121 :Part 1:1989 , EN 50262:1999
Continuous Operating Temperature	-60°C to +150°C
Ingress Protection Rating	IP66, IP67, IP68
Ingress Protection Document	5046 C549K
Deluge Protection Compliance	DTS01 : 91
Deluge Protection Document	5046 C549K-D
Cable Gland Material	Brass, Electroless Nickel Plated Brass, Stainless Steel, Aluminium
Seal Material	CMP Formulated Thermoplastic Elastomer
Cable Type	Unarmoured
Sealing Technique	CMP Unique Displacement Seal Concept
Sealing Area(s)	Cable Inner Bedding & Outer Cable Sheath
Accessories	Adaptor/Reducer , Earth Tag , Locknut , Serrated Washer , Entry Thread Seal , Shroud

